

INSTALLATION INSTRUCTIONS

MSB-6394

DISPLAY MOUNTING INTERFACE[®]

Prior to assembly, unpack carton completely and verify contents.

If you are missing any of the following components, please contact Customer Service at 1-800/582-6480

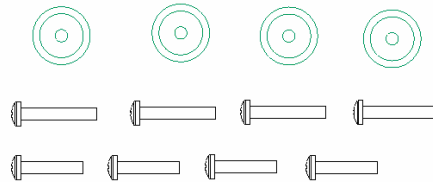


Figure 1

(4) Mounting Buttons – Yellow
(4) M4 X 20mm Phillips Head Screw

(4) M4 x 25mm Phillips Head Screw

BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY

CAUTION! **DISPLAYS ARE EXTREMELY FRAGILE.**

WARNING! **ALL COMPONENTS MUST BE SECURELY FASTENED TO A STRUCTURAL MEMBER CAPABLE OF SUPPORTING 4 TIMES THE COMBINED WEIGHT OF ALL COMPONENTS PLUS THE EQUIPMENT BEING MOUNTED. IF IT CANNOT SUPPORT THIS WEIGHT, THE STRUCTURE MUST BE REINFORCED.**
THE MAXIMUM WEIGHT TO BE INSTALLED ON THE INTERFACE IS 125 POUNDS (56.69 KG).

1. Attach mounting buttons to display using M4 screws (see Figure 2 & Figure 3).
2. With the aid of another person, lift the display up to the Chief Mount, aligning buttons of mounting bracket with slots on the Chief Mount.
3. Raise safety latch on the Chief Mount to secure the display, making sure latch is completely engaged.

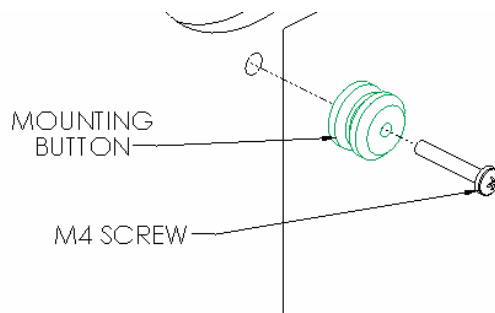


Figure 2

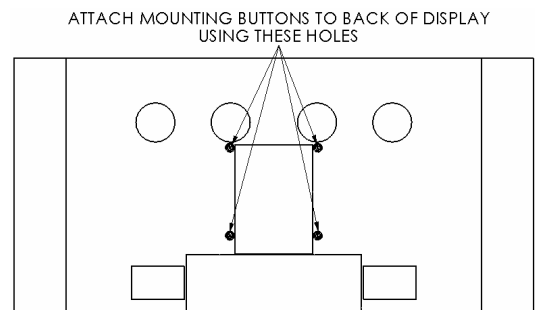


Figure 3